


Assembly Instructions

Super Soccer Goalpost System- 16x6 Ft (4.88x1.83Mt)

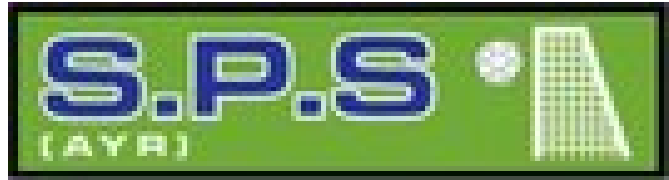

The following instructions should be read carefully before attempting to assemble the Goalposts.

Contents

- Goal Kit Contents
- Safety Notice
- Goal assembly
- The Net
- Dismantling
- Guarantee

Goal Kit Contents

All super soccer goal systems consist of the following:

- 4 x Goalpost Upright & Base (Fully Welded Construction)
- 2 x Crossbars
- 12 x Stainless Steel Base Fixing Pins. Boxed
- 1 x Base Pin Extraction Tool. Boxed
- 1 x Rubber Mallet. Boxed
- 2 x Goal Nets (Includes clips) Boxed
- 20 x Net Fixing Pegs. Boxed
- 1 x Assembly Instructions. Boxed

A selection of spares and replacements are available for purchase.

Safety Notice

The goals should **only** be assembled under **adult supervision**.

Ensure ground conditions are suitable before assembling the goalposts. Check for cables, underground pipes, tiled drains, etc.

Please use goalpost system on grass surfaces only. The system is not designed for use on other surfaces, and we accept no liability for damage suffered as a result of such use.

Goal Assembly

- (i) Place the crossbar on the ground, with the two pre-drilled holes facing upwards.
- (ii) Insert one upright into the crossbar until the interlocking plunger clicks into the pre-drilled hole.
- (iii) The same procedure should be repeated for the other upright.
- (iv) Insert the base fixing pins into the base plate of the uprights where the angled holes have been drilled.
- (v) Erect goals into the position required.
- (vi) Using the mallet, Fix the pins to the ground at the required angle, three pins on each base plate.
- (vii) Once this has been carried out, the goalpost will be stable, minimising the risk of keeling over and causing accidents.

The Net

- (i) Place the net over the frame with the red cord fitting over crossbar and uprights.
- (ii) Fit 16 net clips per goal frame.

Dismantling

- (i) Remove the net pins and clips then remove the net. Place in box provided.
- (ii) Using the extraction tool, remove the goal securing pins, making sure that each upright is held for extra stability.
- (iii) Place the goalposts with the crossbar flat on the ground. To release the unlocking system at the crossbar/upright, use a net peg to depress the plunger, which will allow the crossbar to be pulled apart. Repeat the same procedure with the opposite side. The goalposts are now ready for storage.
- (iv) Use the polystyrene blocks and plastic clips provided to assist in storage.

Guarantee

This product is guaranteed for a period of three years, provided it is used solely in accordance with the specific assembly instructions, against defects in the materials used. Please note that the net is not so guaranteed, nor is damage caused by fair wear and tear.

If, at the sole opinion of the manufacturer, the goal post is faulty it will be repaired or replaced free of charge within fourteen days. The customer is responsible for postage and carriage only.

Goals tested to BSI standards.